

AUX Connector
Please plug it into the original AUX-In Port


Plug into the LVDS pinboard's 5pin port

LVDS pinboard


REMARK: Please stay in the AUX Interface when opening the CARPLAY Interface

DIP SWITCH SETTING
(After changing the dip code, press "reset" or power-on again)


PIN 1	OFF/ON	NG / NG
PIN 2	OFF/ON	NG/Touch point coordinate correction PIN2 "ON", after configuration PIN2 "OFF"
PIN 3	OFF/ON	enable/disable front view camera
PIN 4	OFF/ON	Reversing gridline/Enable 360 panoramic
PIN 5	OFF/ON	NG / NG
PIN 6	OFF/ON	Rear view camera CVBS input / RGB input
PIN 7	OFF/ON	NG / NG
PIN 8	OFF/ON	After market rear view camera/Original rear view camera



- 1) Long press and hold the "NAVI" Button to enter the Interface, long press the "NAVI" Button again to exit.
- 2) Short press "PHONE" Button to open "Siri".
- 3) Knob to control up/down/right/left/ok.

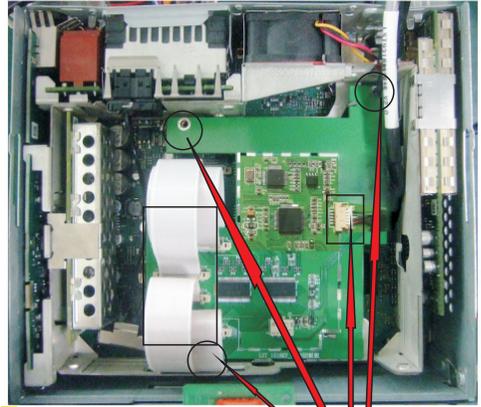

- 1) Install the LVDS pinboard with the original 3pcs screws, then Plug in the 30&50pin FPC cable to the pinboard, install the LCD OUT cable to the pinboard (The LCD OUT cable need to insert from the rear housing of host into the interior of the host).
- 2) Revoocer the installation of the host.

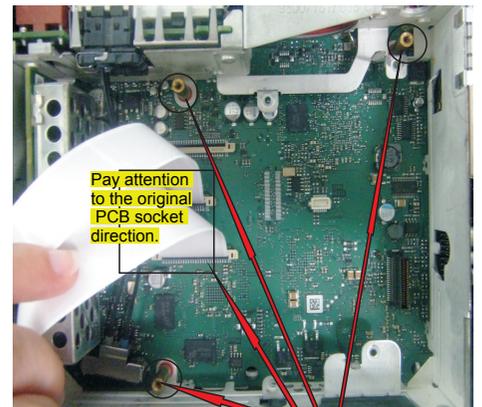

- 1) Unscrew the original 3PCS screws and install 17MM copper column respectively;
- 2) Plug in the 30PIN&50PIN FPC cable (Pay attention to the socket direction) to the original PCB board.