



PREMIER MARINE
ENTERTAINMENT
PRICE LIST



M A R I N E



RADIOS / HEADUNITS

JMS3**JENSEN Marine JMS3 Waterproof Stereo**

- Maximum Power Output 160 watts (Watts x Channel 4 x 40W)
- Bluetooth streaming audio
- IPX6 waterproof design
- Electronic audio settings (Bass/Treble/Balance/Fader)

199€**JMS4****JENSEN Marine JMS4 AM/FM/USB/Bluetooth Waterproof Stereo**

- Maximum Power Output 160 watts (Watts x Channel 4 x 40W)
- Bluetooth streaming audio (A2DP/AVRCP)
- IPX6 waterproof design

269€

SPEAKERS

MS5006B**MS5006W****JENSEN 5.25" Black / White Dual Cone Waterproof Speakers**

- Max Power Handling: 30 Watts
- Waterproof
- ASTM B117 Salt Spray Exposure Standard Compliant
- ASTM D4329 UV Exposure Standard Compliant
- Ø 150mm. Sold Individually

39€**pair****MS6007B****MS6007W****MS6007S****59€****pair****JENSEN 6.5" Black / White / Silver Coaxial Waterproof Speaker**

- Max Power Handling: 60 Watts
- Waterproof
- ASTM B117 Salt Spray Exposure Standard Compliant
- ASTM D4329 UV Exposure Standard Compliant
- Ø 180mm. Sold Individually (or in pairs when ordering MS6007BR)

SPEAKERS

MSX60B



JENSEN 6.5" Speaker 75 WATTS Coaxial

- Max power input: 75W
- Frequency response: 65Hz - 20KHz
- Bridged/suspended tweeter
- Polypropylene cone
- Water and corrosion resistant sealed design

**99€
pair**

MSX60RV




JENSEN 6.5" Coaxial Waterproof Speaker

- Max power handling: 75 watts
- ASTM B117 Salt Spray Exposure Standard Compliant
- ASTM D4329 UV Exposure Standard Compliant
- Speaker color: Gray
- 6.5" Coaxial Waterproof Speaker

**99€
pair**

MSX65S (pair)

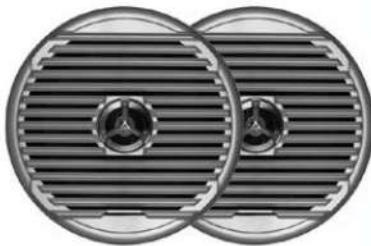

MSX65W (pair)



109€

JENSEN MSX65S – Speaker 6.5" Coaxial 75 WATTS SILVER / WHITE

- Max Power Handling: 75 W
- 65Hz - 20kHz usable frequency response.
- Tweeter material: Titanium.
- Polypropylene woofer: 6.5 ".
- Sensitivity: 88dB.

AMPLIFIERS

POWER 760



JENSEN 4-channel Amplifier 760W

- Channel mode selector switch 4, 3 and 2 channel
- 75 watts RMS continuous x 4 channels at 4 Ohms
- 100 watts RMS continuous x 4 channels at 2 Ohms
- 190 watts RMS continuous x 2 channels bridged at 4 Ohms

219€

SUBWOOFERS

JMPSW800



JENSEN 8" Amplified Subwoofer

- Max Power Handling: 200 watts
- Built-in amplifier
- Adjustable gain and crossover
- Frequency: 60Hz-200Hz

349€

MSW10



JENSEN 300W 10" Subwoofer

- RMS power: 150 WATTS / Maximum power: 300 WATTS
- Frequency response: 20Hz, 1KHz
- Materials resistant to corrosion
- UV resistant ASTM-D4329 standard that withstands weather, cracking and fading.

179€

RG10HW



RG10SB



RG10SS



30€

MSW10, GRILLE HYBRID WHITE REMOVABLE · MSW10, GRILLE BLACK / SILVER REMOVABLE

- for MSW10

ACCESSORIES

JENAUX



JENSEN USB Interface and 1/8" Auxiliary Input Jack

- Audio connector (RCA)
- USB port allows for connection of external storage device
- Waterproof design

39€

ANTENNAS

AN150SR



AM/FM Amplified Antenna

- AM/FM Amplified Antenna
- Includes a 213 cm (7 ft.) cable
- Dimensions 14-1/2" W x 7/8"H x 3/4"D

25€

REF.	DESCRIPTION	PVP UNIT RECOMENDED
RADIOS / HEADUNITS		
P2	<p>P2 - UMC1RTL</p> <ul style="list-style-type: none"> Two-piece modular design (hideaway module PA4ATAB and commander) 2.8" color TFT display viewable in direct sunlight 200 WATTS (50 X 4) max power App Ready - All main functions can be controlled by any Bluetooth - enabled device with Polk Ultramarine app Seven-channel NOAA weatherband Rotary encoder for volume control and menu-driven user interface Conformal coated PCB IPX5 waterproof design UV resistant (ASTM D4329) Corrosion resistant (ASTM D1141) Dimensions: 5.4" W x 3.75" H x 1.7" D 	769€
P1	<p>P1 - Ultramarine App Ready Marine Stereo</p> <ul style="list-style-type: none"> Two-piece modular design (hideaway module PA4ATAB and commander) 4.3" color TFT display commander 200 watts maximum power handling Waterproof commander (IPX6) and module (IPX5) App Ready - All main functions can be controlled by any Bluetooth - enabled device with Polk Ultramarine app Bluetooth streaming audio (A2DP) and controls (AVRCP) 	509€
NMEA2K1	<p>NMEA 2000 KIT FOR POLK PA4A AND POLK P1</p> <ul style="list-style-type: none"> NMEA2KGWTWY JDab to NMEA2000 Gateway for GARMIN , SIMRAD, LOWRANCE , B&G GTWYHRN Harness JWRYCBLS JDab Remote Control Y Cable 	369€

SPEAKERS

DB652



POLK Ultramarine Dynamic Balance 6.5" Coaxial Speakers

- 150W RMS, 300W Peak power handling
- 92 dB sensitivity (1 watt @ 1 meter)
- 40 Hz to 22kHz frequency response
- Polypropylene and UV tolerant cone with waterproof surrounds
- Marine certified (IP55)

129€

pair

UMS66W



UMS66S



Ultra Marine 6.6" Waterproof speaker. Available in White (UMS66W) or Smoke (UMS66S)

- | | | |
|-------------------------------|----------------------------|----------------------------|
| • 150 watts maximum power | • Silver cone | • 87.5 dB sensitivity |
| • Corrosion and UV resistant | • Insulated tinsel leads | • 100 Hz – 20KHz frequency |
| • Free air design | • Mica and polypropylene | response |
| • Cast aluminum basket | woofer | • 2.92-inch mounting depth |
| • High temperature voice coil | • Titanium dome tweeter | |
| • Snap-on grille installation | • 12.4 oz. magnet | |
| option | • 4 Ohms nominal impedance | |

599€

pair

UMS77W



UMS77B



UMS77S



Ultra Marine 7.7" Waterproof speaker. Available in Black (UMS77B), Smoke (UMS77S), or White (UMS77W)

- | | | |
|-------------------------------|----------------------------|----------------------------|
| • 200 watts maximum power | • Silver cone | • 90.2 dB sensitivity |
| • Corrosion and UV resistant | • Insulated tinsel leads | • 70 Hz – 20 KHz frequency |
| • Free air design | • Mica and polypropylene | response |
| • Cast aluminum basket | woofer | • 3.03-inch mounting depth |
| • High temperature voice coil | • Titanium dome tweeter | |
| • Snap-on grille installation | • 25.6 oz. magnet | |
| option | • 4 Ohms nominal impedance | |

679€

pair

SPEAKERS

UMS88W



UMS88B



UMS88S



849€

pair

Ultra Marine 8.8" Waterproof speaker. Available in Black (UMS88B), Smoke (UMS88S), or White (UMS88W)

- 250 watts maximum power
- Corrosion and UV resistant
- Free air design
- Cast aluminum basket
- High temperature voice coil
- Snap-n grille installation option
- Silver cone
- Insulated tinsel leads
- Mica and polypropylene woofer
- Titanium dome tweeter
- 40.3 oz. magnet
- 4 Ohms nominal impedance

- 89.4 dB sensitivity
- 50 Hz - 20KHz frequency response
- 4.06-inch mounting depth

RGB CONTROLLER

XKCHROMEASA



Universal XKchrome Smartphone App Bluetooth Controller

- Take control of your lighting
- RGB Wire not included

199€

SUBWOOFERS

UMS108W



UMS108B



UMS108S



469€

POLK Ultra Marine 10.8" Waterproof subwoofer. Available in Black (UMS108B), Smoke (UMS108S), or White (UMS108W)

- 700 watts maximum power
- Corrosion and UV resistant
- Air suspension
- Cast aluminum basket
- High temperature voice coil
- Snap-on grille installation option
- Silver cone
- Insulated tinsel leads
- Mica and polypropylene woofer
- 70.8 oz magnet
- 4 Ohms nominal impedance
- 89.2 dB sensitivity
- 20 Hz - 2KHz frequency response
- 5.71-inch mounting depth

AMPLIFIERS

PAD2000.2



POLK 125W 2 CHANNEL AMP

- 125 watts RMS x 2 at 4 ohms (250 watts RMS x 2 at 2 ohms)
- 500 watts RMS x 1 in bridged mode (4-ohm stable in bridged mode)
- Variable high-pass filter (20-4000 Hz, 12 dB per octave); variable low-pass filter (50-5000 Hz, 12 dB per octave)

399€

PAD1000.1



POLK 550W MONOBLOCK AMP CLASS D 500W X1

- 500 watts RMS x 1 at 4 ohms (800 watts RMS x 1 at 2 ohms)
- 1200 watts RMS x 1 at 1 ohm
- Variable low-pass filter (40-220 Hz, 12 dB per octave); variable bass boost (0-12 dB at 44 Hz)
- Variable subsonic filter (20-38 Hz, 12 dB per octave)

689€

PAD4000.4



POLK 500W 4 CHANNEL AMP CLAS D

- Signal-to-noise ratio: > 105~ dBA
- Input impedance: 20k Ohms
- Overall frequency response: 20-20 KHz main channels
- Max power handling: 500 watt

639€

PAD5000.5



POLK 660W 5 CHANNEL AMP CLAS D

- Remote Bass Level Control
- Input impedance: > 20k Ohms
- Overall frequency response: 20-20 KHz main channels, 20-250 Hz sub channel
- Sub 1/Sub2 Input

799€

ACCESSORIES

PRC200BC



POLK Marine Wired Remote Control

- Compatible with the Polk PA450UM marine source unit
- Surface mount or rear flush mount
- Waterproof (IPX6)

189€

PRCEC18



POLK Remote Control Extension Cable

- 18' extension cable for Polk wired remote control

25€

PRCYC1



POLK Remote Control Y Cable

- "Y" connection cable for Polk wired remote control
- Allows for connection of multiple Polk remotes

25€



MARINE
AUDIO